

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 24 TOWNSHIP 14 RANGE 3

DATE: 4-26-03 5-5-08

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison

METHOD OF ESTABLISHMENT: County 10-27-98



IN. S.P.C. E ZONE NAD '83

NAME: 14032406

N: 487943.7647(m)

E: 59419.6509(m)

Harrison raised to surface with 1" raiser

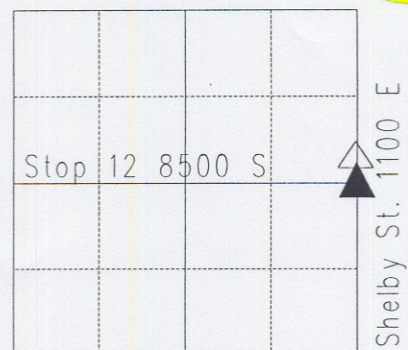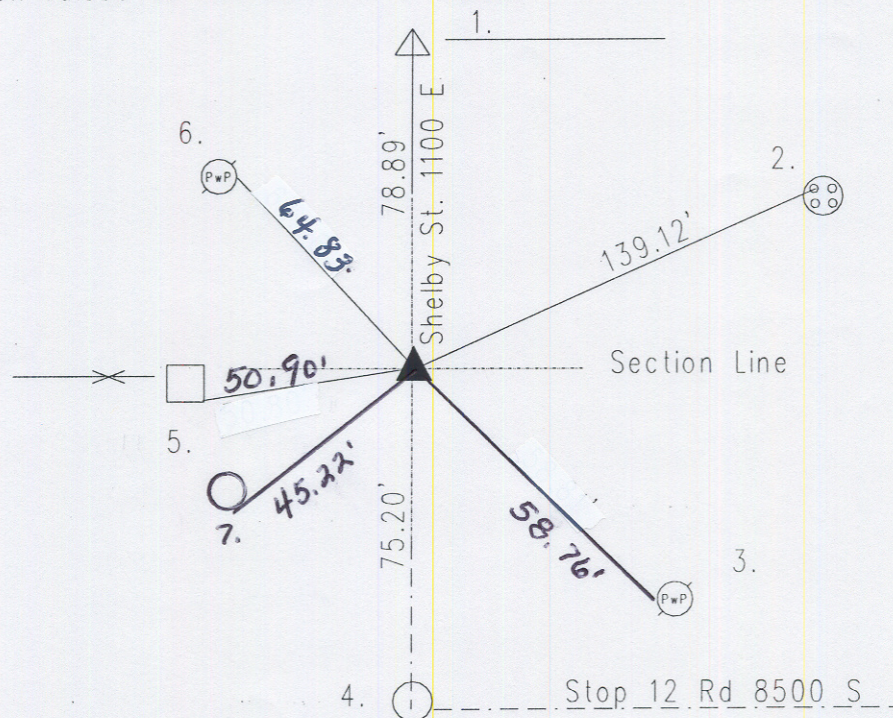

Original post set 1820 by Laughlin with witnesses: 7" beech N 70 E 15 links; 12" beech S 78 W 18 links per Marion County Atlas pg. 5. W. P. Smith 5-13-1889 called stone set per Perry Township Legal Survey pg. 46. Reference, no date, called for stone. 9-3-75 called railroad spike over stone. This corner was excavated 6-2-87 stone found 12" down and Harrison set. Re-tied 10-27-98 by Kiste. Re-tied 4-26-03 by Wilcoxon.

14032406

REF.	DISTANCE	DESCRIPTION
1.	78.89'	Due N to W Q 19-14-4 Harrison
2.	139.12'	Cut 'x' top W concrete light pole base
3.	58.76'	PK nail W PwP#16-818 12"up
4.	75.20'	Due S to C/L of Stop 12 Road 8500 S
5.	50.90'	SE corner of brick column
6.	64.83'	PK nail E PwP#2-41-787 24"up
7.	45.22'	PK nail SE PwP#325-787 12"up